

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:

Capacities & Efficiencies:

Cooling Rated (Min. ~ Max.)	15,000 (3,200 ~ 15,000) Btu/h
Seasonal Energy Efficiency Ratio	SEER 17.0
Moisture Removal	3.4 Pt/h
Heating Rated (Min. ~ Max.)	18,000 (3,200 ~ 21,200) Btu/h
Heating Seasonal Performance Factor	HSPF 10.1
Cooling Mode Nominal Conditions:	Heating Mode Nominal Conditions:
Indoor: 80°F DB / 67°F WB	Indoor: 70°F DB / 60°F WB
Outdoor: 95°F DB / 75°F WB	Outdoor: 47°F DB / 43°F WB
Pipe Length: 25 ft	Pipe Length: 25 ft



Indoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Airflow Rate (H/M/L)	519/436/353 cfm
Heating Airflow Rate (H/M/L)	515/459/402 cfm
Running Current (Rated)	0.18 Amps
Weight	26.5 lbs
Sound Pressure Level at 3.3 ft (H/M/L)	45/41/36 dBA


Outdoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Operating Range (standard)	14°F* – 115°F DB *product will stop operating at -4°F
Cooling Operating Range (with optional wind baffle)	0°F* – 115°F DB *product will stop operating at -4°F
Heating Operating Range (standard)	0°F – 64°F DB
Minimum Circuit Amps (MCA)	13.7 Amps
Maximum Fuse Amps (MFA)	20 Amps
Starting Current	10.0 Amps
Running Current (Cooling/Heating)	5.3 Amps / 6.7 Amps
Weight	117 lbs
Sound Pressure Level at 3.3 ft	51 dBA


R-410A

INVERTER

FTXS15DVJU

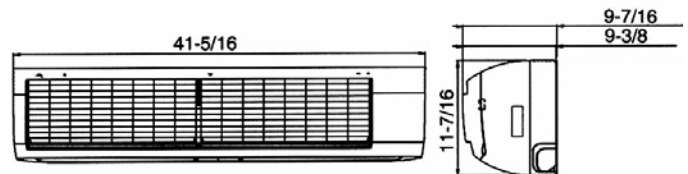

RXS15DVJU

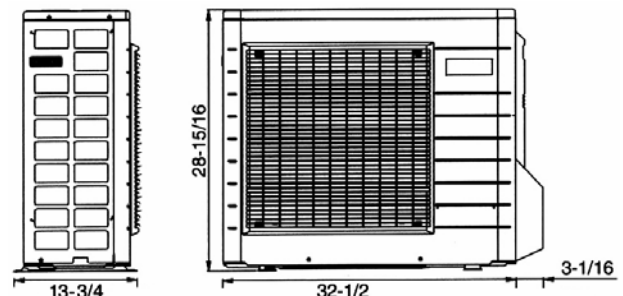

Piping:

Maximum Height Difference	66 ft
Maximum Length	98 ft
Liquid Piping Connection (OD)	φ1/4"
Gas Piping Connection (OD)	φ1/2"
Condensate Drain Piping Connection (OD)	φ11/16"

Standard Features:

Compressor Warranty	7 years
Parts Warranty	5 years
Limited Labor Warranty	1 year
Remote Control	

Options:

Air Purifying Filter with Photocatalytic Deodorizing Function	
Centralized Control/Unified On-Off/Scheduled Timer	