

Submittal Data Sheet

1.5-Ton 4-Way Blow Ceiling-Suspended FXUQ18PVJU

FEATURES

- Low profile of less than 8" with the option to be partially recessed in a false ceiling
- Built-in condensate pump with 19-1/2" lift and safety float switch
- Auto swing function ensures efficient air and temperature distribution
- Air can be discharged in five different angles between 0 and 60°
- Low sound pressure levels down to 36 dBA
- The optional Sensor Kit (occupancy and surface temperature) together with air temperature sensor and advanced control functions enables the unit to provide an exceptional comfort level, energy efficiency, and flexibility

BENEFITS

- Great solution for projects with low or no false ceilings thanks to the compact design
- The four individually controlled air louvers in the unit enable comfort-able space environment in a variety of different room layouts
- Low energy consumption thanks to a specially developed small tube heat exchanger, DC fan motor and drain pump





www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

1.5-Ton 4-Way Blow Ceiling-Suspended FXUQ18PVJU

| PERFORMANCE | | | |
|----------------------------------|------------|-------------------------------|---|
| Indoor Unit Model No. | FXUQ18PVJU | Indoor Unit Name: | 1.5-Ton 4-Way Blow Ceiling-Suspended |
| Туре: | | Rated Cooling Conditions: | Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75 |
| Rated Cooling Capacity (Btu/hr): | 18,000 | Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43 |
| Sensible Capacity (Btu/hr): | | Rated Piping Length(ft): | |
| Cooling Input Power (kW): | | Rated Height Separation (ft): | |
| Rated Heating Capacity (Btu/hr): | 20,000 | | |

| INDOOR UNIT DETAILS | | | |
|---------------------------------------|---------------------------|--|-------------|
| Power Supply (V/Hz/Ph): | 208-230 / 60 / 1 | Airflow Rate (H/M/L) (CFM): | 795/689/565 |
| Power Supply Connections: | L1, L2, Ground | Moisture Removal (Gal/hr): | |
| Min. Circuit Amps MCA (A): | 0.60 | Gas Pipe Connection (inch): | 1/2 |
| Max Overcurrent Protection (MOP) (A): | 15.00 | Liquid Pipe Connection (inch): | 1/4 |
| Dimensions (HxWxD) (in): | 7-13/16 x 37-3/8 x 37-3/8 | Condensate Connection (inch): | |
| Panel (HxWxD) (in): | | Sound Pressure (H/L) (dBA): | 44/40 |
| Net Weight (lb): | 58 | Sound Power Level (dBA): | |
| Panel Weight (lb): | | Ext. Static Pressure (Rated/Max) (inWg): | 1 |

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com


(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet

1.5-Ton 4-Way Blow Ceiling-Suspended FXUQ18PVJU

DIMENSIONAL DRAWING

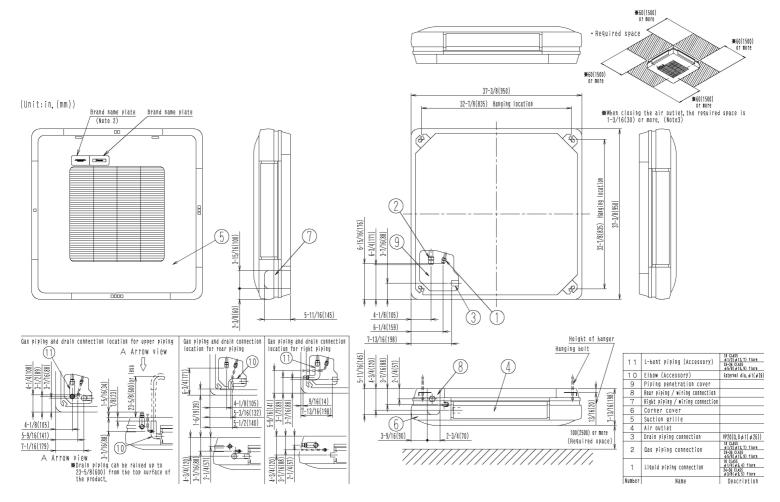

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com