

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:

Capacities & Efficiencies:

Cooling Rated (Min. ~ Max.)	8,500 (4,400 ~ 8,500) Btu/h
Seasonal Energy Efficiency Ratio	SEER 16
Moisture Removal	2.3 Pt/h
Heating Rated (Min. ~ Max.)	10,000 (4,400 ~ 10,000) Btu/h
Heating Seasonal Performance Factor	HSPF 8.8
Cooling Mode Nominal Conditions:	Heating Mode Nominal Conditions:
Indoor: 80°F DB / 67°F WB	Indoor: 70°F DB / 60°F WB
Outdoor: 95°F DB / 75°F WB	Outdoor: 47°F DB / 43°F WB
Pipe Length: 25 ft	Pipe Length: 25 ft



Indoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Airflow Rate (H/M/L)	246/197/148 cfm
Heating Airflow Rate (H/M/L)	253/220/187 cfm
Running Current (Rated)	0.18 Amps
Weight	16.6 lbs
Sound Pressure Level at 3.3 ft (H/M/L)	38/32/25 dBA


Outdoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Operating Range (standard)	14°F* – 115°F DB *product will stop operating at -4°F
Cooling Operating Range (with optional wind baffle)	0°F* – 115°F DB *product will stop operating at -4°F
Heating Operating Range (standard)	0°F – 64°F DB
Minimum Circuit Amps (MCA)	6.1 Amps
Maximum Fuse Amps (MFA)	15 Amps
Starting Current	5.0 Amps
Running Current (Cooling/Heating)	3.93 Amps / 4.8 Amps
Weight	74 lbs
Sound Pressure Level at 3.3 ft	48 dBA


R-410A

INVERTER

FTXS09DVJU

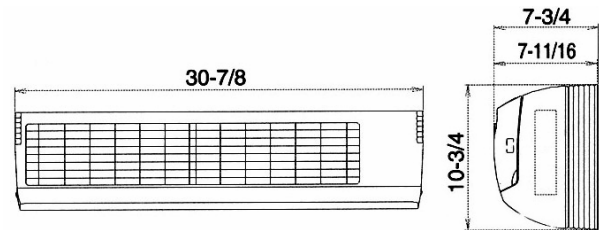

RXS09DVJU

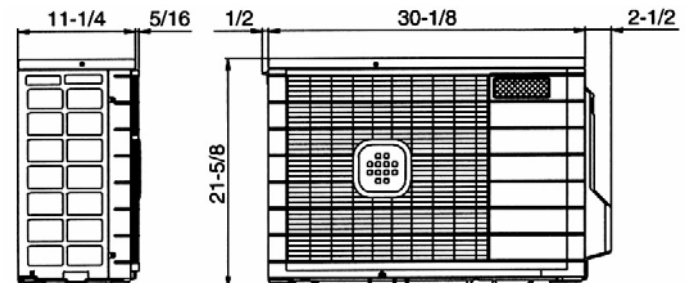

Piping:

Maximum Height Difference	49 ft
Maximum Length	65 ft
Liquid Piping Connection (OD)	ϕ1/4"
Gas Piping Connection (OD)	ϕ3/8"
Condensate Drain Piping Connection (OD)	ϕ11/16"

Standard Features:

Compressor Warranty	7 years
Parts Warranty	5 years
Limited Labor Warranty	1 year
Remote Control	

Options:

Air Purifying Filter with Photocatalytic Deodorizing Function	
Centralized Control/Unified On-Off/Scheduled Timer	