

## **Submittal Data Sheet**

3.0-Ton Multi Position Air Handling Unit FXTQ36TAVJUA

## **FEATURES**

- Capable of upflow, horizontal-right, horizontal-left, and downflow installation. Downflow installation requires the use of a field installed downflow accessory kit.
- Variable speed ECM motor produces nominal CFM up to 0.9å€ external static pressure
- Improved auxiliary heat logic
- Designed with less than 2% air leakage when tested in accordance with ASHRAE 193
- All-aluminum coil
- Precise refrigerant modulation from a 2000 pulse electric expansion valve
- Cool, Dry, Auto, Heat, and Fan operation modes
- Auto Fan Speed automatically adjusts fan speed in relation to space temperature and set point
- Configurable Dry mode
- Optional slide-in electric heat available up to 10 kW

## **BENEFITS**

- Optimized fan speed from Auto Fan Speed logic
- Reduced auxiliary heat dead band
- Configurable electric heat on/off temperature settings
- Compact footprint fits tight spaces





www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

3.0-Ton Multi Position Air Handling Unit FXTQ36TAVJUA

PERFORMANCE			
Indoor Unit Model No.	FXTQ36TAVJUA	Indoor Unit Name:	3.0-Ton Multi Position Air Handling Unit
Туре:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	36,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	24,400	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.440	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	40,000		
Heating Input Power (kW):	0.44		


INDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1,050/900/750
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	4.90	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	45 x 17.5 x 21	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure (H) (dBA):	52
Net Weight (Ib):	140	Sound Power Level (dBA):	60
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.90 / 0.90

www.daikinac.com www.daikincomfort.com



Submittal Data Sheet 3.0-Ton Multi Position Air Handling Unit FXTQ36TAVJUA

## **DIMENSIONAL DRAWING**

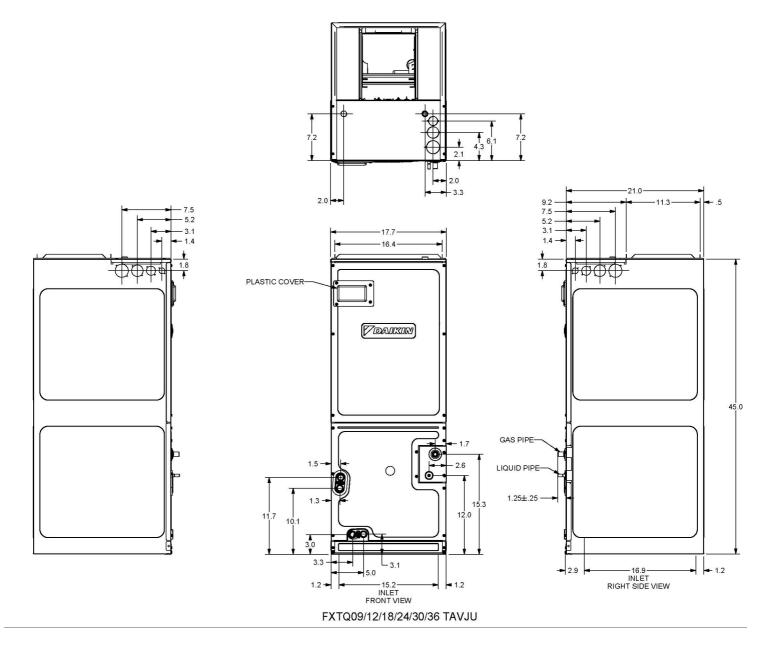

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)