



Description

The BACnet™ Thermostat combines the power of a space-mounted equipment controller with the convenience of a built-in temperature sensor. The controllers include factory supplied programs for the following applications:

- Two and four pipe fan coil units
- Roof top units
- Heat pump units

Applications

Stand alone operation. No special programming, software applications, or setup tools are required to configure and commission a *BACnet* Thermostat. All options can be set by using only the five front panel buttons and the east-to-read menus in the full color display.

New or retrofit applications. The attractive two-piece design is ideal for new installations or upgrades of older, less efficient thermostats. The *BACnet* Thermostat installation requires only mounting the backplate to a wall or electrical box, connecting wires to screw terminals, and plugging the thermostat into the backplate.

Bright, full-color display. The full color display is easy to read across a room even in bright sunlight. Users can easily choose between Fahrenheit or Celsius values. The display features large numbers and simple color icons to indicate heating or cooling, occupied, unoccupied or local setback modes, and fan operation.

Network ready. All models are native *BACnet*, Application Specific Controllers ready to connect to a *BACnet* MS/TP network. Device instance, MAC address, and baud rate are set from the password protected front controls. All models feature a hardware clock and *BACnet* schedule that can be set up from the front panel or as standard *BACnet* objects and properties.



WARNING

Only personnel that have been trained to install, adjust, service or repair (hereinafter, "service") the equipment specified in this manual should service the equipment. The manufacturer will not be responsible for any injury or property damage arising from improper service or service procedures. If you service this unit, you assume responsibility for any injury or property damage which may result. In addition, in jurisdictions that require one or more licenses to service the equipment specified in this manual, only licensed personnel should service the equipment. Improper installation, adjustment, servicing or repair of the equipment specified in this manual, or attempting to install, adjust, service or repair the equipment specified in this manual without proper training may result in product damage, property damage, personal injury or death.

Hardware

Full color user interface

The user interface is a color display and has five push buttons. Back lighting automatically starts when any button is pushed and remains lit for 60 seconds after the last button is pushed. Through the menu driven display, an operator can do the following:

- Change setpoints and fan, heating, cooling modes
- Choose between Fahrenheit or Celsius values
- Set *BACnet* addressing
- Set up and commission the installation
- Add or change user passwords
- Configure any available options

Security

Separate passwords for users and control technicians and engineers.

Screen type

- 128 × 128 pixels
- Active color LCD with LED back lighting
- 1.00 × 1.04 inches (25 × 26 mm)

Inputs and outputs

All inputs and outputs for the *BACnet* Thermostat are set up at the factory and do not require set up in the field.

Inputs

Analog inputs for discharge air temperature, water supply temperature, outside air temperature, fan status, and remote temperature sensor.

- Sensors are automatically detected
- Inputs accept industry-standard 10K ohm Type II thermistor sensors
- Input overvoltage protection up to 24 volts AC, continuous
- 12-bit analog-to-digital conversion
- Relay outputs
- All relay outputs are normally open, SPST, Form “A” relays
- 1 Ampere maximum per relay at 24 volts AC or DC for each output. Maximum for all relay outputs is 3 amperes (72VA)

Analog outputs

- Short-circuit protected
- Loads up to 10 mA at 0-12 volts DC
- 8-bit PWM digital-to-analog conversion

Connections

Screw terminal blocks, wire size 14-22 AWG, for inputs, outputs, power, and network connections.

BACnet™ communication

- Integral peer-to-peer *BACnet* MS/TP network communications
- Network speed from 9600 to 76,800 baud
- Front panel selection for device instance, MAC address, and baud rate
- Meets or exceeds ANSI/ASHRAE *BACnet* Standard 135-2008 for Application Specific Controllers

Table 1: Accuracy-temperature only models

Type	Thermistor
Accuracy	±0.36°F (±0.2°C)
Resistance	10,000Ω at 77°F (25°C)
Operating Range	48 to 96°F (8.8 to 35.5°C)

Regulatory approval

- UL 916 Energy Management Equipment
- FCC Class A, Part 15, Subpart B and complies with Canadian ICES-003 Class B
- *BACnet* Testing Laboratory listed
- SASO PCP Registration KSA R-103260



Operating Sequences

Fan Coil Units

BACnet Thermostats for the control of fan coil units are available with inputs, outputs, and sequences of operation for the following functions.

- Two-pipe heating and cooling with on/off valves or modulating valves
- Four-pipe heating and cooling with on/off valves or modulating valves
- Three-speed fan control
- Remote space temperature sensor

Roof Top Units

BACnet™ Thermostats for the control of roof top or similar packaged or split unitary units are available with inputs, outputs, and sequences of operation for the following functions.

- One or two stage heating
- One or two stage cooling
- Optional economizer
- Automatic or manual fan control
- Modulating valves or on/off heating and cooling valves
- Remote space temperature sensor

Heat Pump Units

BACnet Thermostats for the control of heat pump units are available with inputs, outputs, and sequences of operation for the following functions.

- Two stages of heat and two stages of cooling plus auxiliary heat
- Optional economizer
- Automatic or manual fan control

Installation Information

Mounting

Backplate mounts to a standard 2x4 vertical handy-box or Euro style box. The controller is secured to the backplate with a concealed Allen screw.

Table 2: Mounting Information

General	
Material	White flame-retardant plastic
Weight	Approx. 6 oz. (170 grams)
Supply Voltage	24 volts AC (-15%, +20%), 50-60 Hz, 12 VA, Class 2 only, non-supervised (all circuits, including supply voltage, are power limited circuits)
Environmental Limits	
Operating	32 to 140°F (0 to 49°C)
Shipping	-40 to 160°F (-40 to 71°C)
Humidity	0 to 95% RH non-condensing

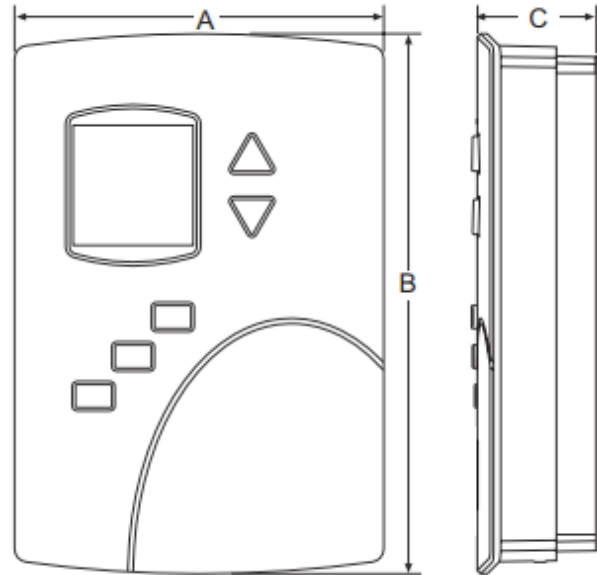


Table 3: Dimensions in Inches (mm)

A	B	C
3.5 (89)	5.12 (130)	1.13 (29)

Ordering Information

Table 4: Materials List

Description	Product Number	Model Name
Fan Coil Unit	25083500	MIT-FA-005
2-pipe and 4-pipe		
Modulating or ON/OFF valves		
Modulating or Three-speed fan		
Roof Top Unit	25083400	MIT-RA-007
Modulating or ON/OFF valves		
One or two-stages heat		
One or two stages cooling		
Fan control		
Economizer	25083600	MIT-HA-009
Heat Pump Unit		
3 heat, 2 cool		
Fan Control		
Economizer		

Training and Development

Now that you have made an investment in modern, efficient Daikin equipment, its care should be a high priority. For training information on Daikin HVAC products, please visit us at www.daikinac.com and click on Training.

Warranty

Consult your local Daikin representative for warranty details. To find your local Daikin representative, go to www.daikinac.com.

Aftermarket Services

To find your local parts or service office, visit www.daikinac.com or call 855-770-5678.

Daikin North America LLC reserves the right to discontinue or change at any time, specifications or designs without notice or without incurring obligations.