



Submittal Data Sheet

Upflow / Downflow Cased "A" Coil for VRV
CXTQ60TASBLU

FEATURES AND BENEFITS

- Compatible with VRV LIFE™ outdoor units (model RXSQ_TAVJU)
- Compatible with Daikin communicating gas furnaces as part of the industry's first dual-fuel multi-zone system
- Available in 2, 3, 4, and 5 ton capacities
- Designed for use with R-410a
- Features an electronic expansion valve with PID control for precise capacity control
- All-aluminum evaporator coil
- Rust resistant, UV resistant drain pan with secondary drain connection
- Foil-faced insulation covers internal casing to reduce cabinet condensation
- Split seam front for easy access
- Suitable for upflow or downflow installation
- AHRI certified; ETL listed
- Standard Limited Warranty: 10-year limited parts warranty



Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet

Upflow / Downflow Cased "A" Coil for VRV
CXTQ60TASBLU

SPECIFICATIONS

Indoor Model No.	CXTQ60TASBLU	Indoor Unit Name:	5 Ton Cased "A" Coil
Type:	Upflow / Downflow Cased A Coil	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	60,000	Rated Heat Pump Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	40,000	Rated Heat Pump Heating Capacity:	68,000

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	24VAC from Gas Furnace	Airflow Rate (H/M/L):	1800 / 1530 / 1260
Power Supply Connections:	TB1, TB2	Pressure Drop Wet/Dry (in. w.g. @ H):	0.33 / 0.23
Height (in.):	30-1/16	Gas Pipe Connection (in.):	5/8
Width (in.):	21-7/32	Liquid Pipe Connection (in.):	3/8
Depth (in.):	24-7/32	Condensate Connection (in.):	3/4
Net Weight (lb.):	79		

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)





Submittal Data Sheet

Upflow / Downflow Cased "A" Coil for VRV
CXTQ60TASBLU

DIMENSIONAL DRAWING

Model	Nominal Tons	Cabinet Dimensions (in.)			Refrigerant Pipe Connection		Shipping Weight (lbs)
		H	W	D	Liquid	Suction	
CXTQ24TASBLU	2	22-1/16	17-23/32	24-7/32	3/8	5/8	46
CXTQ36TASBLU	3	22-1/16	17-23/32	24-7/32	3/8	5/8	52
CXTQ48TASBLU	4	30-1/16	21-7/32	24-7/32	3/8	5/8	72
CXTQ60TASBLU	5	30-1/16	24-23/32	24-7/32	3/8	5/8	79

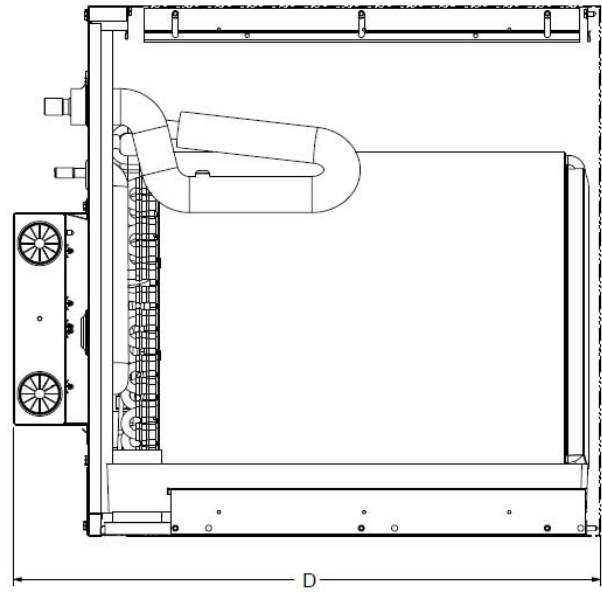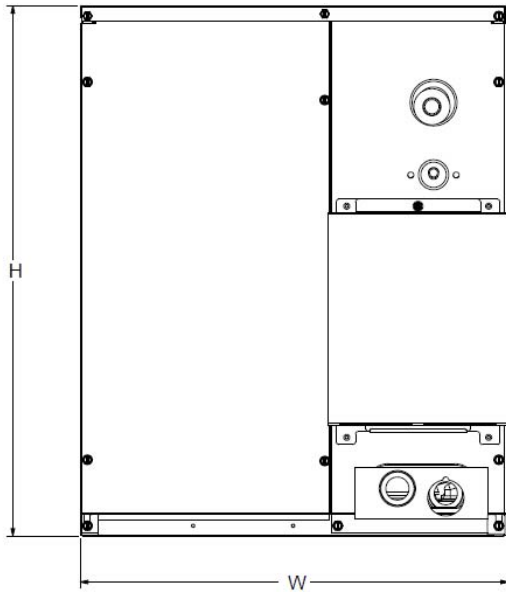

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)