



## Submittal Data Sheet

Upflow / Downflow Cased "A" Coil for VRV  
CXTQ24TASBLU

### FEATURES AND BENEFITS

- Compatible with VRV LIFE™ outdoor units (model RXSQ\_TAVJU)
- Compatible with Daikin communicating gas furnaces as part of the industry's first dual-fuel multi-zone system
- Available in 2, 3, 4, and 5 ton capacities
- Designed for use with R-410a
- Features an electronic expansion valve with PID control for precise capacity control
- All-aluminum evaporator coil
- Rust resistant, UV resistant drain pan with secondary drain connection
- Foil-faced insulation covers internal casing to reduce cabinet condensation
- Split seam front for easy access
- Suitable for upflow or downflow installation
- AHRI certified; ETL listed
- Standard Limited Warranty: 10-year limited parts warranty



Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056  
[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



## Submittal Data Sheet

Upflow / Downflow Cased "A" Coil for VRV  
CXTQ24TASBLU

### SPECIFICATIONS

Indoor Model No.	CXTQ24TASBLU	Indoor Unit Name:	2 Ton Cased "A" Coil
Type:	Upflow / Downflow Cased A Coil	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	24,000	Rated Heat Pump Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	16,000	Rated Heat Pump Heating Capacity:	27,000

### INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	24VAC from Gas Furnace	Airflow Rate (H/M/L):	800 / 680 / 560
Power Supply Connections:	TB1, TB2	Pressure Drop Wet/Dry (in. w.g. @ H):	0.089 / 0.052
Height (in.):	22-1/16	Gas Pipe Connection (in.):	5/8
Width (in.):	17-23/32	Liquid Pipe Connection (in.):	3/8
Depth (in.):	24-7/32	Condensate Connection (in.):	3/4
Net Weight (lb.):	46		

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056  
[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)





**Submittal Data Sheet**

Upflow / Downflow Cased "A" Coil for VRV  
CXTQ24TASBLU

**DIMENSIONAL DRAWING**

Model	Nominal Tons	Cabinet Dimensions (in.)			Refrigerant Pipe Connection		Shipping Weight (lbs)
		H	W	D	Liquid	Suction	
CXTQ24TASBLU	2	22-1/16	17-23/32	24-7/32	3/8	5/8	46
CXTQ36TASBLU	3	22-1/16	17-23/32	24-7/32	3/8	5/8	52
CXTQ48TASBLU	4	30-1/16	21-7/32	24-7/32	3/8	5/8	72
CXTQ60TASBLU	5	30-1/16	24-23/32	24-7/32	3/8	5/8	79

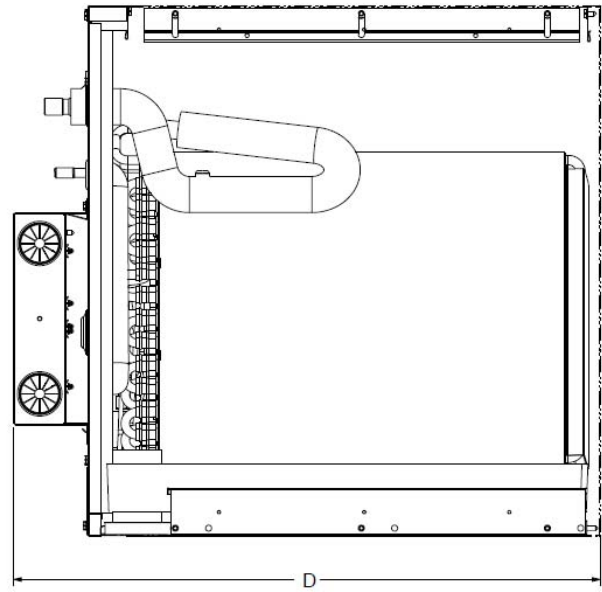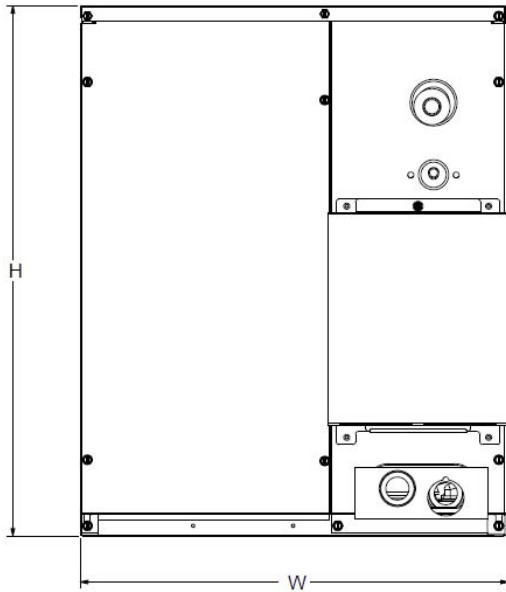

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056  
[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)